

VEXCEL
IMAGING

ULTRACAM OSPREY 4.1

New perspectives on 3D Aerial Mapping





ULTRACAM OSPREY 4.1

Taking collection efficiency to new heights.

The UltraCam Osprey 4.1 collects photogrammetry-grade nadir imagery plus oblique images simultaneously, enabling unprecedented flight collection efficiency at industry-leading image and data quality.

The UltraCam Osprey introduces the 4th generation UltraCam aerial imaging sensors. A highly versatile system, the UltraCam Osprey simultaneously collects photogrammetry grade nadir images (PAN, RGB and NIR) and oblique images (RGB) in four directions. As a result of a combination of industry-leading customized lens systems, next generation image sensors with custom electronics, and a best-in-class image processing pipeline, the UltraCam Osprey 4.1 delivers imagery of unprecedented quality in terms of detail resolution, clarity and dynamic range. The system pushes urban flight productivity to new levels, collecting

1.2 Gigapixels every 0.7 seconds. Customers can fly faster, cover more area and see more detail. The new and innovative Adaptive Motion Compensation (AMC) method compensates for multidirectional motion induced image blur and additionally also compensates for ground sampling distance variations in oblique images, produces imagery of unprecedented vividness and sharpness. From orthophotos to point clouds and 3D models, the UltraCam Osprey 4.1 high-performance system sets new standards in urban mapping and 3D city modeling.



AICKE DAMRAU
ULTRACAM OSPREY CUSTOMER

“We selected the UltraCam Osprey knowing that it was developed based on sound photogrammetric principles. The integration of the sensor and the uniquely continuous UltraMap software workflow are a winning advantage over other solutions on the market.”

Specifications & details

Technical changes, printing errors, mistakes and amendments reserved.


SENSOR SYSTEM

View	Parameter	Value	Imaging sensor	CMOS
Nadir	PAN image size	20,544 x 14,016 pixels	Shutter (longlife central leaf)	Prontor magnetic-0 HS; field exchangeable
	PAN physical pixel size	3.76 µm	Motion compensation (multi-directional)	Adaptive Motion Compensation (AMC)
	Color capability (multi-spectral)	4 channels - RGB Bayer pattern & NIR	Frame rate (min. inter-image interval)	1 frame per 0.7 seconds
	Color image size	12,840 x 8,760 pixels	Dynamic range	> 83 dB at base ISO
	Color physical pixel size	3.76 µm	Analog-to-digital-conversion at	14 bits
	Pansharpen ratio	1 : 1.6	Spectral bands (FWHM ¹)	R (580 - 690 nm) G (480 - 600 nm) B (420 - 510 nm) IR (690 - 800 nm) PAN (430 - 690 nm)
Oblique	Color capability	3 channels - RGB Bayer pattern		
	Color image size	14,144 x 10,560 pixels		
	Color physical pixel size	3.76 µm		

¹ Full Width at Half Maximum.

DATA STORAGE SYSTEM

Type: <u>Solid state disk pack</u> (in-flight exchangeable)	Redundancy: <u>Yes, optional</u>
Storage capacity: <u>16 TB</u>	Size of one raw image: <u>3,300 MB</u> (<u>2,400 MB without optional redundancy</u>)
Weight of data unit: <u>1 kg</u>	Number of raw images: <u>Up to 4,100</u> (<u>6,200 without optional redundancy</u>) ²



Power consumption:
330 W (average)
350 W (peak)




Weight:
<58 kg



Cylinder diameter:
395 mm




Operator display:
Vexcel IPT v3 with 1024 x 768 resolution and 2.1 kg

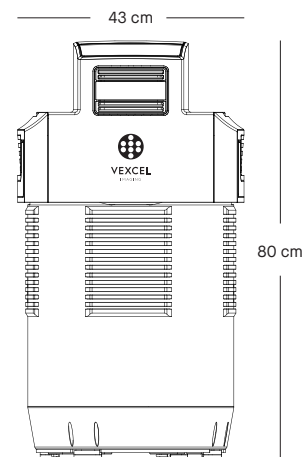

² Due to configuration and change in SSD technology, usable storage size may vary and can not be guaranteed.

LENS SYSTEM

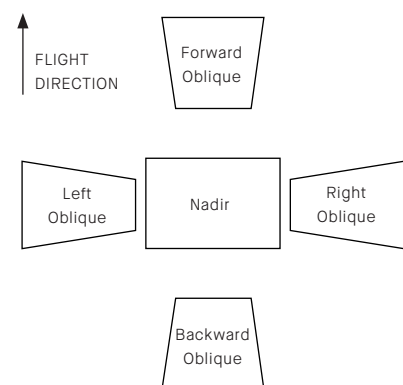

View	Parameter	Value
Nadir	PAN lens system focal length	80 mm
	PAN lens aperture	f=1/4.8
	Color (RGB Bayer pattern & NIR) lens system focal length	50 mm
	Color (RGB Bayer pattern & NIR) lens aperture	f=1/4.0
Nadir	Total field of view, across track	51.5°
	Total field of view, along track	36.5°
Oblique	Color (RGB Bayer pattern) lens system focal length	120 mm
	Color (RGB Bayer pattern) lens aperture	f=1/4.0
	Total field of view, across track	45° (+9.2° / -15.1°)
	Total field of view, along track	45° (+9.2° / -9.2°)



Sample flying heights:
2128m @ 10cm GSD
1596m @ 7.5cm GSD

OPERATIONAL SPECIFICATION



FLIGHT ALTITUDE
≤ 7,000 m
above sea level



HUMIDITY
5 % to 95 %, non-condensing



TEMPERATURE
-20 °C to +45 °C
(operation, sensor)
0 °C to +45 °C
(operation, computer)
-20 °C to +65 °C (storage)



MOUNTING
UltraMount (GSM 4000 & GSM 3000)
and most current third party mounts³



GNSS/INS/FMS
UltraNav (Applanix POSTrack OEM) and most current third party systems³



INSTALLATION
(Camera, UltraNav & UltraMount):
<98 kg,
480 W (average)
560 W (peak)



DATA PROCESSING
UltraMap processing suite
including data export in standard formats

³ Please contact our sales team for detailed information.

BENEFIT FROM OUR
TECHNOLOGY

When you partner with Vexcel Imaging, you get more than an UltraCam.

- You get cutting-edge technology combined with a progressive service concept for constant product upgrades, world-class support and one-stop solutions.

Today and tomorrow.



Vexcel Imaging GmbH • Anzengrubergasse 8 • 8010 Graz • Austria
www.vexcel-imaging.com

